



Code: 00 3F00000

VD 32 - 230V 50Hz

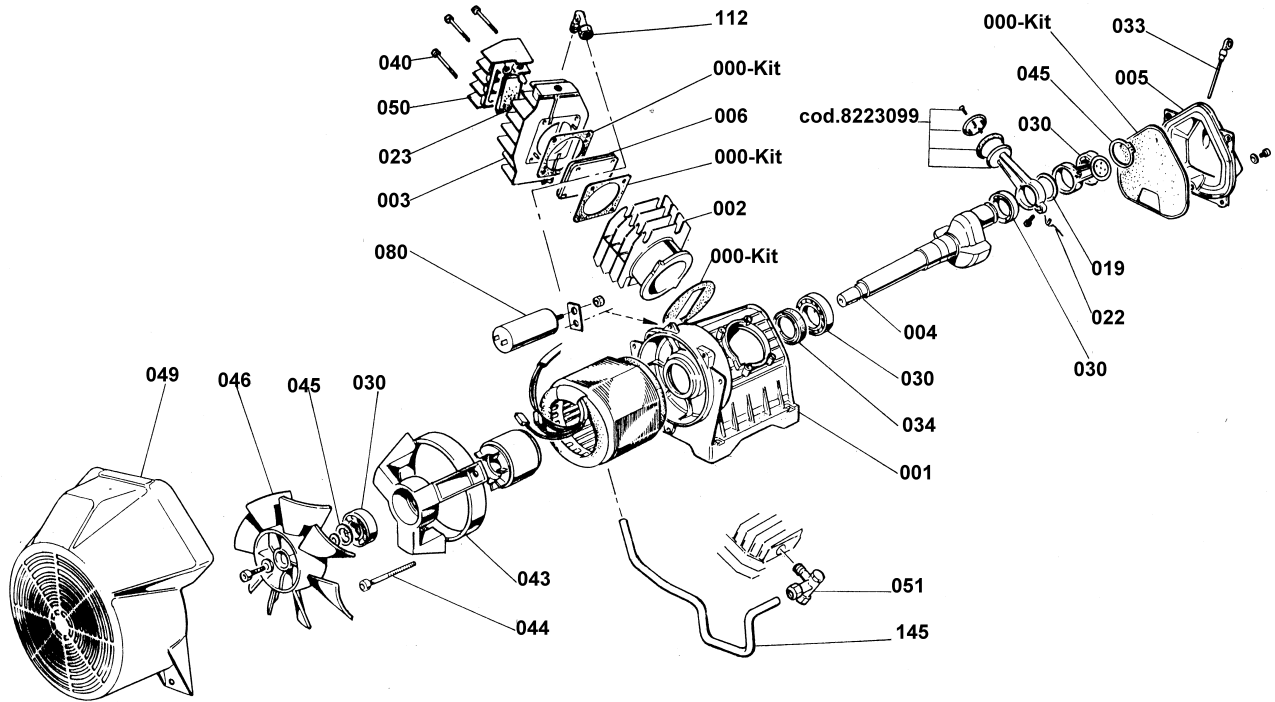

Dimensions:

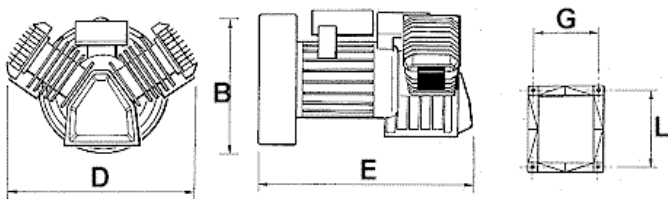

In mm

A	B	C	D	E	F	G	L	M	N	P
	270	/	350	400	/	130	156	/	9	D.15

Box Weight: 22 Kg Box Dimensions: W x D x L: 406 x 501 x 377

Tightening Torques, Cylinder Head:

Bolt Size:	M6	
Min Torque:	9.3	Nm
Max Torque:	11.36	Nm

Technical Data:

Cylinders:	2		
Stages:	1		
Air Flow:	345	L/min	12.2 cfm
Power:	2.2	Kw	3 HP
Speed:	2850	rpm	
Max Pressure:	9	Bar	131 psi

Code: 00 3F00000

VD 32 - 230V 50Hz



<i>Svc</i>	<i>Ref</i>	<i>Code</i>	<i>Description</i>	<i>Qty</i>	<i>Modified</i>
<input checked="" type="checkbox"/>	000	00 3F50050	Gasket Kit	1	
<input type="checkbox"/>	001	00 3F60100	Crankase	1	
<input type="checkbox"/>	002	00 6P30000	Cylinder	2	
<input type="checkbox"/>	003	00 7361400	Pump head	2	
<input type="checkbox"/>	004	00 3F60200	Crankshaft	1	
<input type="checkbox"/>	005	00 3F60300	Crankase gasket	1	
<input checked="" type="checkbox"/>	006	00 0540051	Valve plate assy.	2	
<input type="checkbox"/>	019	00 9140010		1	
<input type="checkbox"/>	022	00 9014010	Oil dipper	1	
<input checked="" type="checkbox"/>	023	00 7181100	Filter	2	
<input type="checkbox"/>	030	00 9170020	Bearing	1	
<input type="checkbox"/>	030	00 9170022	Bearing	2	
<input type="checkbox"/>	030	00 9170091	Bearing	1	
<input type="checkbox"/>	033	00 9024022	Oil fill plug	1	
<input type="checkbox"/>	034	00 9163020	Oil seal	1	
<input type="checkbox"/>	040	00 9101125	Cylinder head bolts	8	
<input type="checkbox"/>	043	00 6562203	Motor cover	1	
<input type="checkbox"/>	044	00 9011041	Motor bolts	3	
<input type="checkbox"/>	045	00 9140120	Circlip	1	
<input type="checkbox"/>	045	00 9140160	Circlip	1	
<input type="checkbox"/>	046	00 9038110	Fan	1	
<input type="checkbox"/>	049	00 832210D	Cover	1	
<input type="checkbox"/>	050	00 830130A	Cover plate	2	
<input type="checkbox"/>	051	00 9053839	3 wai fitting	1	
<input type="checkbox"/>	080	00 9067028	Capacitor	1	
<input type="checkbox"/>	112	00 9053005	Connection	1	
<input type="checkbox"/>	145	00 9046807	Delivery pipe	1	

Svc = Service Item